



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H02N 2/00, H01L 41/22	A1	(11) International Publication Number: WO 92/06532 (43) International Publication Date: 16 April 1992 (16.04.92)
---	-----------	---

(21) International Application Number: PCT/US90/06539

(22) International Filing Date: 13 November 1990 (13.11.90)

(30) Priority data:
589,850 28 September 1990 (28.09.90) US

(71) Applicant: CATERPILLAR INC. [US/US]; 100 Northeast Adams Street, Peoria, IL 61629-6490 (US).


(72) Inventors: GRAWLEY, Charles, E. ; 210 E. Orchard Place, Peoria, IL 61603 (US). KELLEY, Kurtis, C. ; 914 Birchwood Drive, Washington, IL 61571 (US).

(74) Agents: NOE, Stephen, L. et al.; Caterpillar Inc., 100 Northeast Adams Street, Peoria, IL 61629-6490 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH, CH (European patent), DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GB, GB (European patent), GR (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL, NL (European patent), NO, RO, SE, SE (European patent), SU*.

Published
With international search report.

(54) Title: COATING SURROUNDING A PIEZOELECTRIC SOLID STATE MOTOR STACK

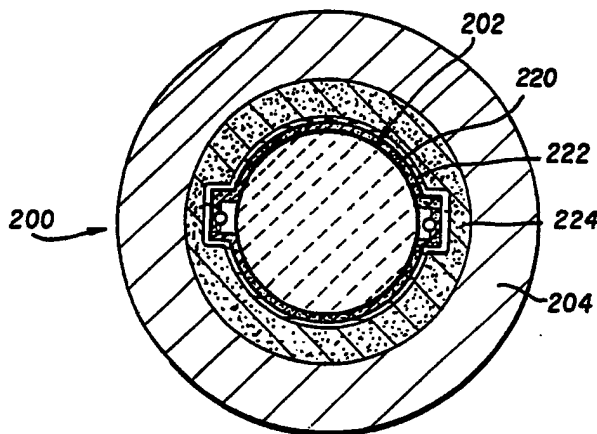

(57) Abstract

An encapsulated piezoelectric solid state motor stack (100, 200) having a plurality of piezoelectric disks interleaved with a plurality of electrodes (102, 202). A first elastomer (220) is used for encapsulating the stack to prevent arc-over. A second elastomer (224) is used for encasing the combination of the encapsulating elastomer and the stack. An elastomer grease (222) is sandwiched between the encapsulating elastomer and the encasing elastomer for reducing friction between the combination and the encasing elastomer. The friction is induced by an axial displacement produced between first and second end surfaces of the stack when the electrodes are biased by a source of electrical potential. The structure also includes a protective housing (104, 204) including a diaphragm (118). The housing (104, 204) cylindrically encases the combination of the stack (102, 202), the encapsulating elastomer (220), the elastomer grease (222) and the encasing elastomer (224), and the one end thereof. The diaphragm (118) is attached to the housing (104 and 114) for encasing the other end of the combination.

+ DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

**COATING SURROUNDING A PIEZOELECTRIC
SOLID STATE MOTOR STACK**

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The field of the invention relates generally to
10 an encapsulation structure for solid state motor
actuators, and more particularly to a process for
encapsulating piezoelectric solid state motor stacks.

2. Related Art

15

For decades electroexpansive materials have been
employed in stacked structures for producing actuation
used for fuel injection and valve control in diesel
engines, for example. Commercially manufactured solid
20 state motor stacks, or actuators, are produced using
piezoelectric disks interleaved with metal foil
electrodes. Application of high voltage, low current
power to alternately biased electrodes causes each of
the piezoelectric disks to expand or axially distort.
25 The additive deflection of the stacked disks is
typically amplified by hydraulics to effectuate useful
actuation.

An example of a conventional electromechanical
actuator having an active element of electroexpansive
30 material is found in United States Patent No.
3,501,099 to Glendon M. Benson. Benson's 1970 patent
is directed to both an actuation amplification
structure and a method for manufacturing piezoelectric
stacks. Sheets of ceramic material are rolled,
35 compacted and punched into ceramic disks. After a

-2-

cleaning process, the disks are stacked with alternate sets of continuous disk electrodes disposed between the ceramic disks. The stacks undergo a pressurized cold-welding process, followed by an elevated temperature and pressure bonding process after common electrodes are connected to the two electrode groups. The stacks are poled by application of a DC voltage and then encapsulated with a plastic insulative cover prior to final mounting within a transducer housing.

Another conventional method uses epoxy to bond lead zirconium titanate (PZT) ceramic discs together, interleaved with metal foil electrodes. The epoxy used in this process has a lower modulus of elasticity than the ceramic and acts as a compliant layer in the bonded stack structure, thus reducing the additive displacement during actuation.

A modified technique for preparing piezoelectric disks includes a two-stage press/lap manufacturing process. After punching or individually compressing the disks, the thickness of each disk is reduced by lapping. Piezoelectric disk thicknesses are limited to approximately .254 mm by this process and require high voltage to generate lattice distortion. Higher driving voltages necessitate larger, more expensive power generation circuits. In turn, the delivery of the higher voltage to the stack imposes wiring harness and connector design difficulties. Moreover, the larger power circuits generate additional heat which must be removed from the engine. These tradeoffs plague stack design and drive up the cost of systems using stacks to actuate valves or injection controls, for example.

Moreover, the ability to mass produce stacks is limited by the time and cost of manufacturing the disks themselves. Conventional punching or

-3-

compressing combined with lapping/polishing results in low disk yield due to the time elements of the two step process and disk breakage during the lapping step.

5 Various environmental design considerations are important in piezoelectric stack manufacturing. Device operating temperature ranges and external mechanical stresses are the most serious of these factors.

10 Conventional stacks are limited to a maximum operating temperature of about 75° celsius, measured at the outside of the stack housing. Heat generated by the stack itself is compounded by the extreme heat generated by the engine upon which the housed stack is typically mounted. Stack temperatures can reach
15 upward of 40°-50°C above the measured engine temperature.

20 On the other hand, structural defects typically lead to conventional stack failure due to shear and torsional stresses applied to the stack during operation and/or installation. Structural stack failure is most commonly attributed to fatigue cracking of the ceramic disks. Separation between disks/electrodes is also a frequent problem.

25 Piezoelectric stack insulation has been introduced between the disk/electrode stack and the housing in an attempt to minimize some of the above mentioned problems.

30 United States Patent No. 4,011,474 to Cormac G. O'Neill discloses several methods for improving stack insulation to avoid operation breakdowns. Arc-over is allegedly avoided by maintaining contact between the piezoelectric stack and the insulating material. In a first embodiment, O'Neill teaches introducing a pressurized insulating fluid such as oil, into the
35 housing of a piezoelectric stack. The fluid is

-4-

pressurized so as to maintain contact between the fluid and the stack during radial shrinkage, or axial expansion, upon the application of an applied voltage.

5 In a second embodiment, O'Neill applies a solid polyurethane coating to the stack. The coating is kept in contact with the stack by a pressurized insulating fluid to prevent separation during operation and arc-over associated therewith.

10 A third O'Neill embodiment maintains contact between the stack and a solid insulating coating by winding a filament or tape around the coated stack. The tape is wound around the coating to preload the coating to prevent separation of the coating from the stack. The winding of the tape is spaced to allow for
15 expansion of the polyurethane coating during operation of the stack.

The present invention constitutes an improvement over conventional encapsulation technology. Benefits, such as increased stack operational temperature range,
20 endurance, output, and lifetime, are achieved by the present invention.

SUMMARY OF THE INVENTION

25

The present invention is directed to an encapsulated piezoelectric solid state motor stack having a plurality of piezoelectric disks interleaved with a plurality of electrodes. A first elastomer is
30 used for encapsulating the stack to prevent arc-over. A second elastomer is used for encasing the combination of the encapsulating elastomer and the stack. An elastomer grease is sandwiched between the encapsulating elastomer and the encasing elastomer for
35 reducing friction between the combination and the

-5-

encasing elastomer. The friction is induced by an axial displacement produced between first and second end surfaces of the stack when the electrodes are biased by a source of electrical potential.

5 The structure also includes a protective housing and a diaphragm. The housing cylindrically encases the combination of the stack, the encapsulating elastomer, the elastomer grease and the encasing elastomer. The housing also encases one end of the
10 combination. The diaphragm is attached to the housing for encasing the other end of the combination.

 The present invention is also directed to a method for encapsulating a piezoelectric solid state motor stack having a plurality of disks interleaved
15 with electrodes. The method includes the step of encapsulating the stack with a first material, followed by encasing the combination of the first material and the stack within a protective housing, and then sandwiching a lubricant between the
20 combination and the protective housing for reducing friction between the combination and the protective housing.

25 BRIEF DESCRIPTION OF THE DRAWINGS

 The invention will be better understood if reference is made to the accompanying drawings in which:

30 FIG. 1 shows a side-sectional view of a housed, encapsulated piezoelectric solid state motor stack in connection with the present invention;

 FIG. 2 shows a top-sectional view of the housed piezoelectric stack of Figure 1 taken through line
35 A-A;

-6-

FIG. 3 is a flow chart of the basic steps in a method for encapsulating a piezoelectric stack in connection with the present invention;

5 FIG. 4 is a flow chart of the basic steps in a method for pre-encapsulation preparation of a piezoelectric stack in connection with the present invention;

10 FIG. 5 is a flow chart of the basic steps in a method for preparation of a desiccator for use in the encapsulation of a piezoelectric stack in connection with the present invention;

15 FIG. 6 is a flow chart of the basic steps in a method for applying an elastomer in the encapsulation of a piezoelectric stack in connection with the present invention; and

20 FIG. 7 is a flow chart of the basic steps in a method for the final housing assembly of a piezoelectric stack in connection with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Broadly, the present method for encapsulating piezoelectric stacks is designed for an automated manufacturing process to yield high-quality, high-durability solid state motor stacks in great volume. The piezoelectric encapsulation steps of the present process have refined the technology by employing
30 careful cleaning and inspection operations which result in stacks that can displace 0.13% in fast response times of 100 microseconds, and produce driving forces greater than 35 MPa. Unlike
35 conventional piezoelectric solid state motor stacks, which have relatively limited temperature ranges,

-7-

stacks encapsulated according to the present invention have an extended operational temperature range between about -40°C and +100°C (measured externally; plus an additional 40° to 50°C measured internally).

5 Encapsulated piezoelectric solid state motor stacks of the present invention are high-force devices that can be used to improve engine performance, reduce emissions, and reduce engine noise. The utility of the present invention is not, however, limited to
10 encapsulating stacks for engine valve and fuel injector actuation. Encapsulated stacks of the present invention may be used in brake or shock absorbing systems, for example. Moreover, the invention may be used to encapsulate a wide variety of
15 devices or systems which operate in high temperature, or otherwise extreme environments.

 It should be understood that the present invention is directed to a piezoelectric solid state motor stack encapsulation structure and the method of
20 encapsulating the stack structure. However, the terms solid state motor stack and electroexpansive actuator, for example, are synonymous. Throughout this discussion, the piezoelectric solid state motor stacks will be commonly referred to as "stacks."

25 FIG. 1 shows an encapsulated solid state motor stack, 100, in connection with the present invention. An electrode/ceramic disk stack 102 is centered in a housing 104. The steel case, or housing 104, is cylindrical in shape with a hollow cylindrical cavity
30 for housing the solid state stack. Throughports 106 are bored in the top end of the housing to permit bus lead wires 108 to exit the housing. Threads 110 attach the piezoelectric solid state motor housing to an engine head. Plateau 112 represents a hexagonal
35 cross section, if viewed from the top of FIG. 1. This

-8-

hexagonal structure is not shown in the figure, but is used for tightening and loosening the piezoelectric solid state motor housing on the engine head.

5 The preferred embodiment of the assembled piezoelectric solid state electrode/disk stack 102 is described in the concurrently filed, commonly assigned co-pending application Serial No. (Attorney Docket No. 1246.0100000/90-220), titled "Piezoelectric Solid State Motor Stack", the entire disclosure of which is
10 incorporated herein by reference.

FIG. 2 is a cross-sectional view taken through line A-A of the piezoelectric solid state motor stack and housing of FIG. 1. The details of FIG. 2 will be covered during the following discussion of the
15 encapsulation process.

A generalized stack encapsulation process 300 is shown in FIG. 3. As shown at block 302, the stack undergoes a cleaning process. In one embodiment, excess gloss and contaminants are removed from the
20 exterior of the assembled stack and bus bar structure by a conventional grit blasting technique. The stack is ultrasonically cleaned in a methanol bath. The cleaned stack is then heat dried at block 304.

Block 306 represents a series of pre-
25 encapsulation steps. This pre-encapsulation process 400 is shown in more detail at FIG. 4. The bus wires are electrically shorted at block 402 to prevent electrostatic charging of the stack, because of its inherent capacitive characteristics. The stack is
30 then placed in a conventional vacuum desiccator fixture to remove volatile contaminants, as shown at block 404. The stack is then cooled before applying a primer, as indicated at 406, and in accordance with primer manufacturer instructions.

35

-9-

A coating of primer is applied to the exterior of the stack and bus bar structure at block 408 in preparation for the silicone coating process. Dow Corning SilGuard Primer No. 1200 or an equivalent may be used. The primer is cured (at block 410) in accordance with conventional curing techniques, according to manufacturer specifications.

The details of the desiccator preparation step of block 308 in FIG. 3 are shown at process 500 of FIG. 5. The stack is aligned in a modified alignment fixture at block 502 such that a small axial compressive load can be applied to the stack as shown at block 504. The alignment fixture should comprise a cylindrical case including a bottom/end section and a load screw for applying an axial compression to the stack. The bottom has two openings to permit the bus leads to pass therethrough. In addition, the inner diameter of the alignment fixture case should be slightly larger than the outside diameter of the stack in order to permit proper encapsulation. Stoppers must then be inserted in the holes at the base of the alignment fixture to seal around the bus bar leads. The composition of the alignment fixture case and port stoppers is not crucial to the invention. However, their composition must not be such that contamination of the stack or chemical reactions occur therewith.

The prepared alignment fixture is then positioned in the vacuum desiccator as shown at block 508. The axial load is released and the desiccator is then sealed as shown at blocks 510 and 512, respectively. A vacuum is then created in the desiccator as shown at block 514, to draw out a sufficient volume of air so that the elastomer will fill the voids in the stack when the vacuum is released.

-10-

The application of an elastomer, shown in block 310 in FIG. 3 will be described in further detail with reference to process 600 in FIG. 6. A silicone elastomer, Dow Corning SilGuard 184, for example, is mixed as per the manufacturer's suggested directions. This preparation is shown at block 602. The silicone elastomer mix is then injected into the desiccator through a glass tube and then into the spaces between the stack and the inside wall of the alignment fixture case as shown at 606. The vacuum desiccator is then gradually pressurized, and an axial load of at least about 1500 psi is applied to the stack by the load screw attached to the assembly fixture case as shown at blocks 608 and 610, respectively.

As shown at blocks 612 and 614, respectively, the excess silicone elastomer is drained from the alignment fixture and the stoppers removed. The silicone elastomer encapsulant is then cured in an oven, as shown at block 616.

In the presently preferred embodiment, curing is accomplished at about 65°C for approximately 4 hours. The present inventors have found that curing time is inversely proportional to the curing temperature and that the maximum cure temperature is approximately 100°C. More significantly, the inventors have found that cure temperature at this stage directly affects the minimum operating temperature of the motor stack. They have found that the lower the cure temperature, the lower the minimum operating temperature that they can achieve.

The fixture is then allowed to cool as shown at block 618 and the elastomer thickness measured as shown at 620. A determination is made, see block 622, whether the desired thickness of the silicone elastomer encapsulant has been reached. This

-11-

determination is based on whether the bus bar and tab structures are sufficiently covered so as to prevent arc-over. If the desired thickness is not reached as indicated at 624, the stack is then dipped in
5 elastomer as shown at block 628. Steps 616, 618, 620, 622 and 628 are repeated until the desired thickness is reached as shown at 632. The stack is then removed from the fixture as shown at block 634.

The two end coatings of silicone elastomer
10 encapsulant are trimmed, as shown at 636. Once trimmed, the layer of silicone elastomer, shown at 220 of FIG. 2, coats the cylindrical surface of the assembled stack 202, as well as the bus bar and electrode tab structure. Trimming exposes the end
15 surfaces of the assembled stack to permit direct transfer of translational motion from the stack to a diaphragm member during actuation. Otherwise, the untrimmed end coating of elastomer would act as a compliant layer.

20 The sequence at 700 of FIG. 7 represents the final assembly of the stack in the housing. Poling of the stack, as shown at block 702, is done once the stack is assembled, in accordance with guidelines provided by the ceramic manufacturer. In the
25 presently preferred embodiment, poling is done at an elevated temperature, for example 145°C. The poling voltage signal is applied to the stack in three stages. During the first stage a 0-volt to 1200-volt charge is applied linearly. This voltage is held
30 constant during the second stage. Finally, at the third stage the voltage is linearly reduced to 0-volts during a five-minute period. The stack is then cooled to room temperature. The poling technique is conventional and is a function of the ceramic material
35 used.

-12-

Referring again to FIG. 2, a thin coat of Dow Corning silicone vacuum grease 222 is applied to the surface of the silicone elastomer encapsulant 220. Enough grease should be applied to prevent adhesion of the silicone encapsulant 220 to potting material 224. The application of the grease to the stack is shown at block 704.

As depicted by 706, the bus wires are soldered to the bus bars and a layer of shrink-wrap tubing is applied as an insulator.

The coated, assembled stack is then inserted into housing 104 and centered. Once in position, a potting material is injected into the cavity between the stack and the housing (a thickness of approximately 4-5 mm). See block 710. In addition, the potting material's thermoconductive characteristics should be sufficient to conduct heat generated by the stack to the inside of the housing wall. Emerson Cummings Eccosil Model 5954 is preferred for the potting material, because it includes aluminum oxide for enhanced thermal conductivity. The potting material is cured according to conventional techniques, as shown at block 712.

In FIG. 2, the potting material is shown at numeral 224, sandwiched between the grease 222 and the inner cylindrical surface of housing 204. Again, the silicone elastomer encapsulant is shown at 220. Silicone grease coating is shown at 222. Finally, silicone potting material is shown at 224.

As shown in block diagram 714, surface 114 of housing 104 and the exposed surface of ceramic end cap 116 must be simultaneously ground to facilitate proper alignment of steel diaphragm 118 to the end of the stack housing assembly. The diaphragm 118 may then be laser-welded to surface 114 of housing 104 as depicted at 716.

-13-

The diaphragm is preferably made of stainless steel and has a thickness of about 0.25mm. The steel diaphragm functions to protect the stack from external contaminates. In addition, the diaphragm prevents the electrode/disk stack from rotating within the housing.

Typically, a piston or spring is abutted against the bottom of the stack when the housed stack is installed on an engine head, for example. During installation, the housed stack is screwed onto the engine head and the diaphragm transfers stresses to the housing. If no diaphragm were present, the friction between the ceramic end-cap of the stack and the piston would cause the stack to rotate. Rotation of the stack would in turn cause disks to shear, and separate, and the silicone encapsulant would rupture. Such structural defects would detrimentally affect stack operation.

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. Thus the breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

30

35

-14-

WE CLAIM:

1. An encapsulated piezoelectric solid state motor stack (100,200) having a plurality of disks interleaved with electrodes (102), comprising:
 - first means (220) for encapsulating the stack;
 - second means (224,204) for encasing the combination of said first means and the stack; and
 - third means (222) sandwiched between said first and second means for reducing friction between said combination and said second means induced by an axial displacement produced between first and second end surfaces of the stack when the electrodes are biased by a source of electrical potential.
2. An encapsulated piezoelectric solid state motor stack (200) according to claim 1, wherein said first means (220) comprises an elastomer.
3. An encapsulated piezoelectric solid state motor stack (200) according to claim 2, wherein said first elastomer comprises silicone.
4. An encapsulated piezoelectric solid state motor stack (200) according to claim 1, wherein said second means comprises:
 - an elastomer (224) surrounding said combination and said third means; and
 - a protective housing (104,204) including a diaphragm (118), wherein said housing cylindrically encases said combination and said third means and one end thereof, said diaphragm being attached to said housing for encasing the other end of said combination.

-15-

5. An encapsulated piez electric solid state motor stack (200) according to claim 4, wherein said elastomer comprises silicone and aluminum oxide to enhance the thermal conductivity of said silicone.

5

6. An encapsulated piezoelectric solid state motor stack (200) according to claim 1, wherein said third means (222) comprises a grease.

10

7. An encapsulated piezoelectric solid state motor stack (200) according to claim 6, wherein said grease comprises silicone.

8. An encapsulated piezoelectric solid state motor stack according to claim 2, wherein said second means comprises:

a metal housing (204); and
a second elastomer (224) comprising silicone and aluminum oxide to enhance the thermal conductivity of said silicone.

20

9. A method for encapsulating a piezoelectric solid state motor stack (100,200) having a plurality of disks interleaved with electrodes (102), comprising the steps of:

25

encapsulating the stack with a first material (220);

encasing the combination of said first material and the stack within a protective housing (204); and

30

sandwiching a lubricant (222) between said combination and said protective housing for reducing friction between said combination and said protective housing, wherein said friction is caused by biasing

35

-16-

the stack to produce an axial displacement between first and second end surfaces of the stack.

10. A method for encapsulating a piezoelectric solid state motor stack (100,200) according to the method of claim 9, wherein said encapsulating step further comprises the steps of:

grit blasting the stack to remove debris;
cleaning the stack to remove unwanted
contaminants;
applying said first material (220) to the
stack; and
curing said first material.

11. A method for encapsulating a piezoelectric solid state motor stack (100,200) according to the method of claim 10, wherein said application step further comprises the steps of:

applying a primer to the stack;
curing said primer; and
applying an elastomer (220) to said primed
stack.

12. A method for encapsulating a piezoelectric solid state motor stack (100,200) according to the method of claim 9, wherein said sandwiching step further comprises the steps of:

coating said lubricant (222) on said
combination;
aligning said coated combination in said
protective housing (204);
introducing a potting material (224) between
said coated combination and said protective housing;
and
curing said potting material.

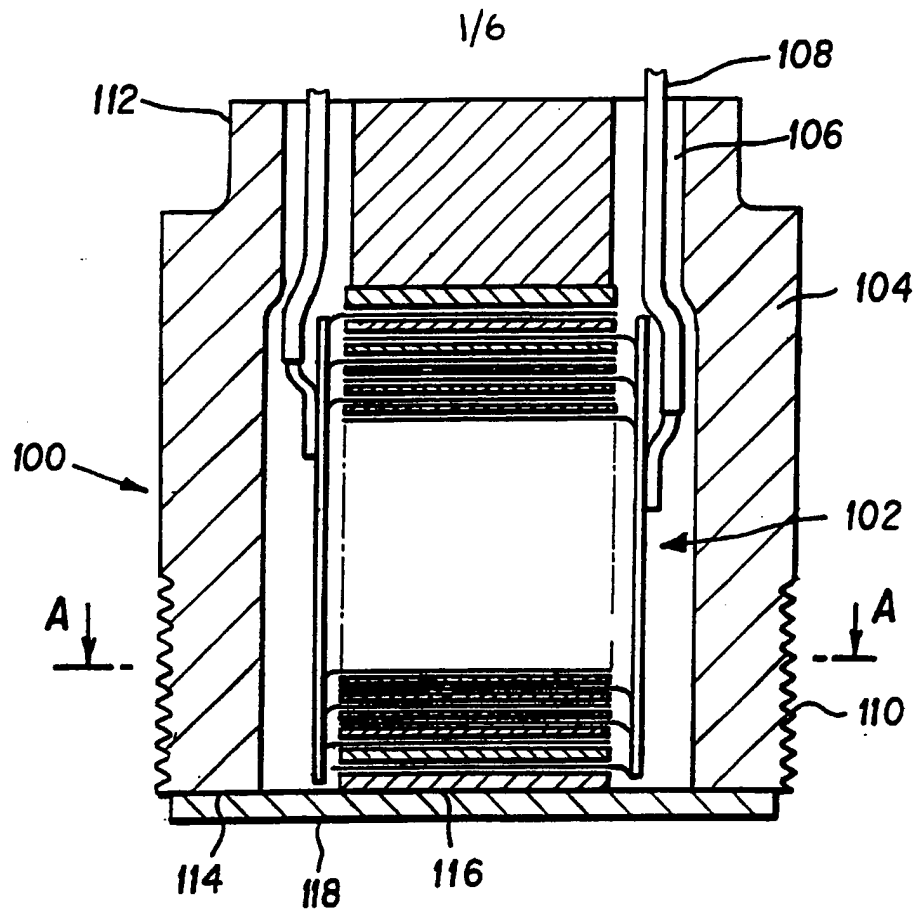


FIG. 1

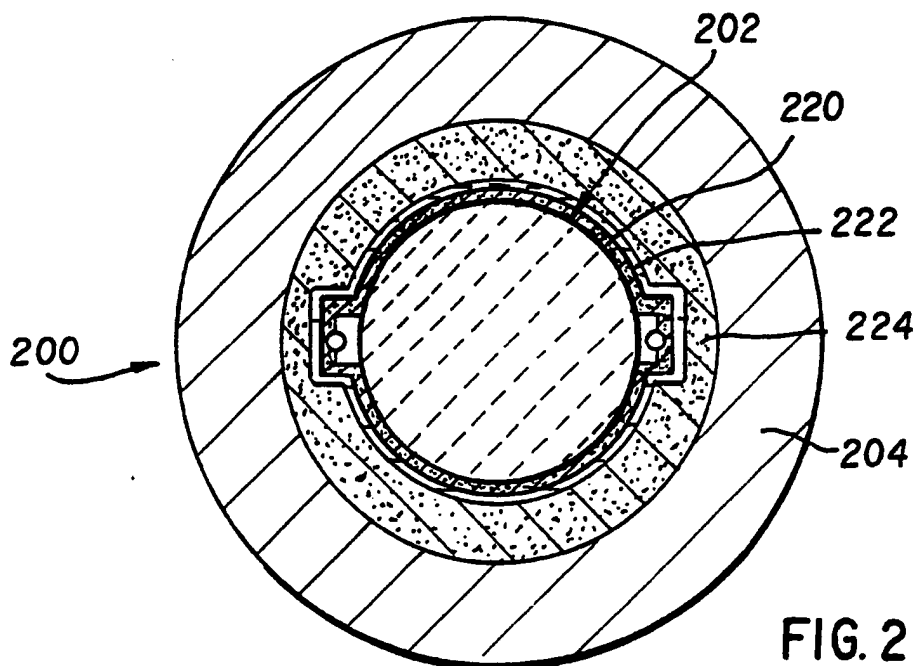


FIG. 2

2/6

FIG. 3



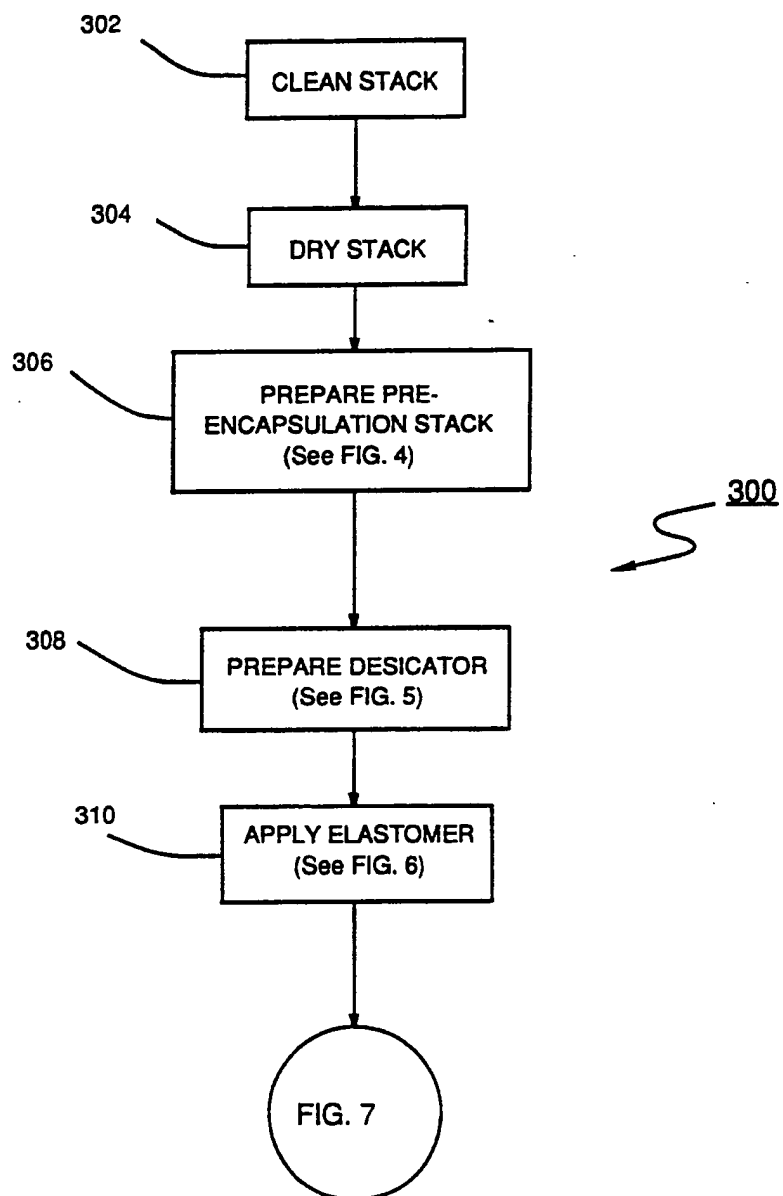


FIG. 4

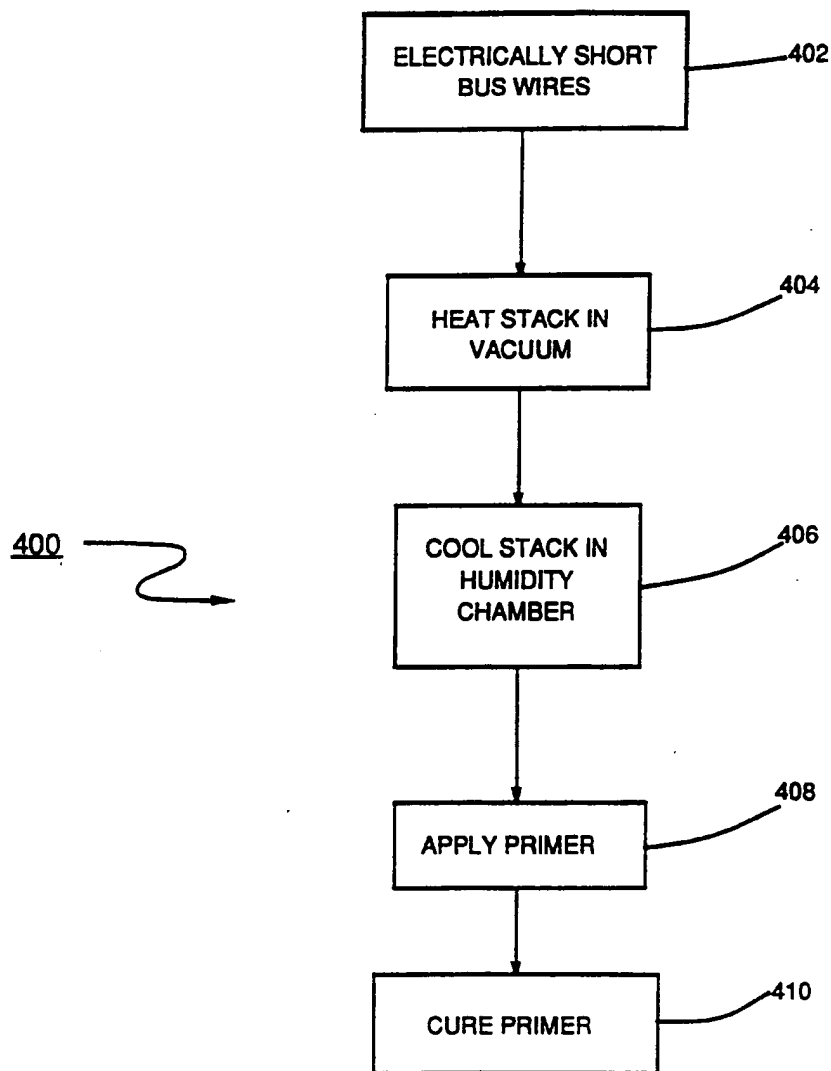


4/6

FIG. 5

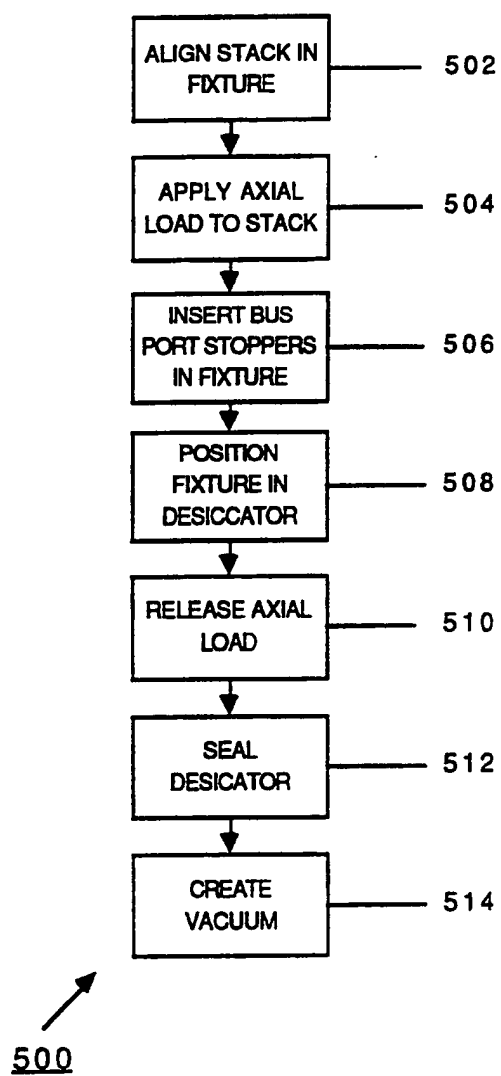


5/6

FIG. 6

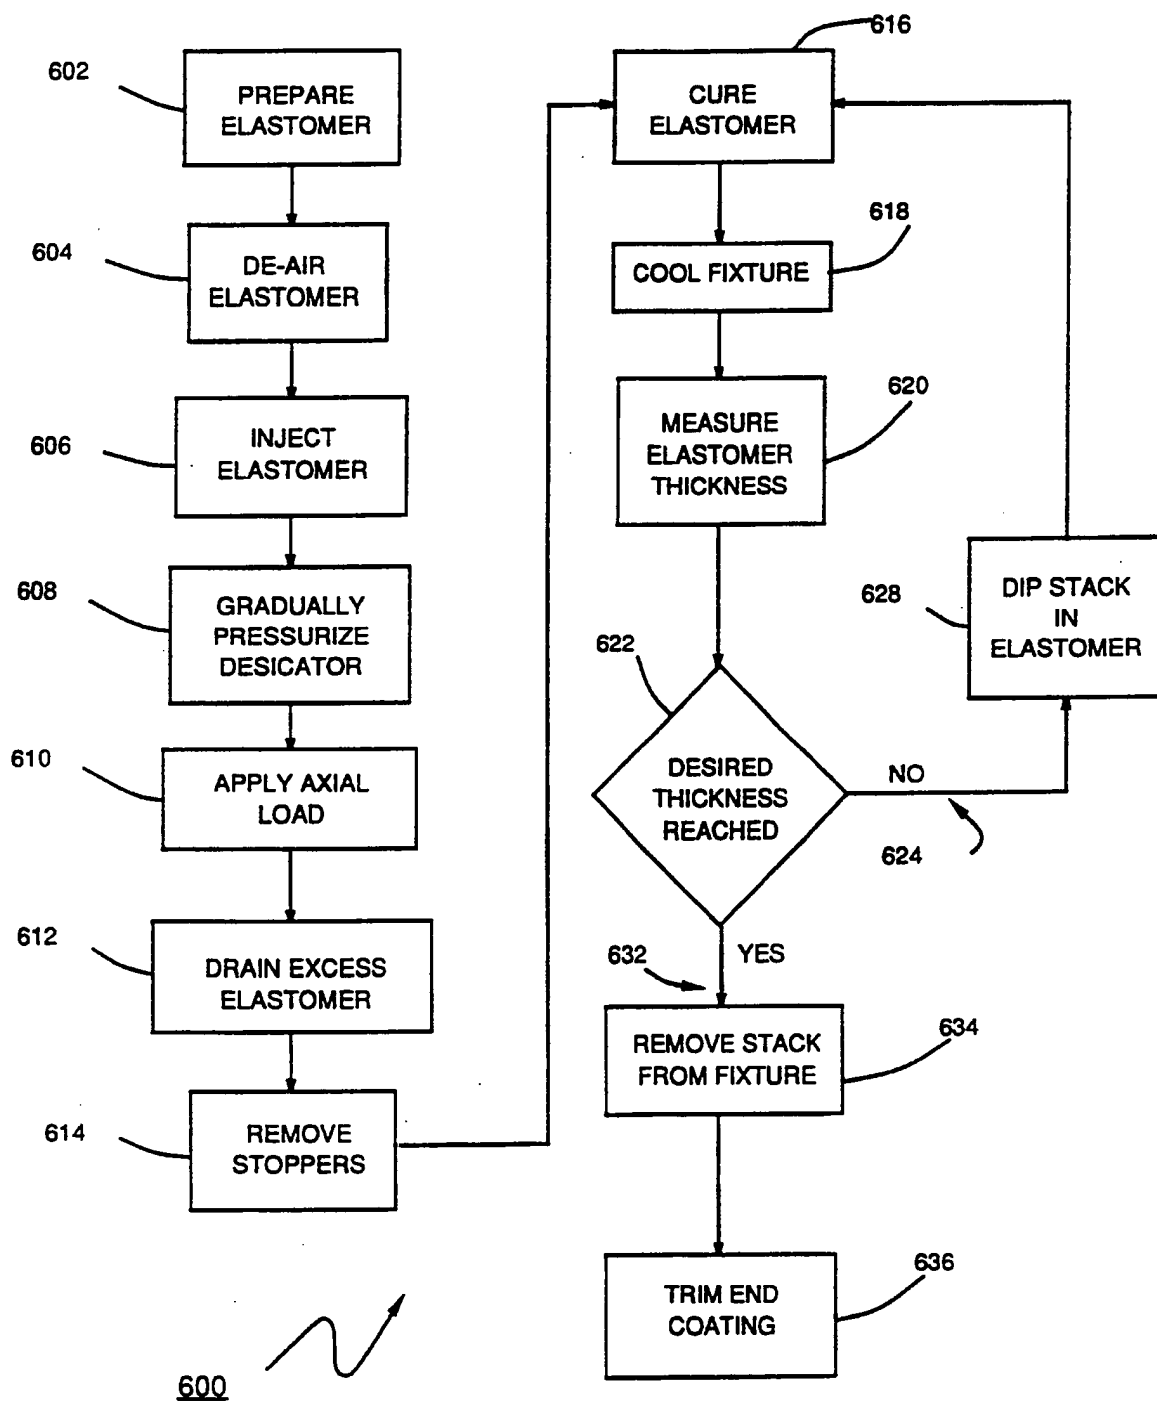

6/6

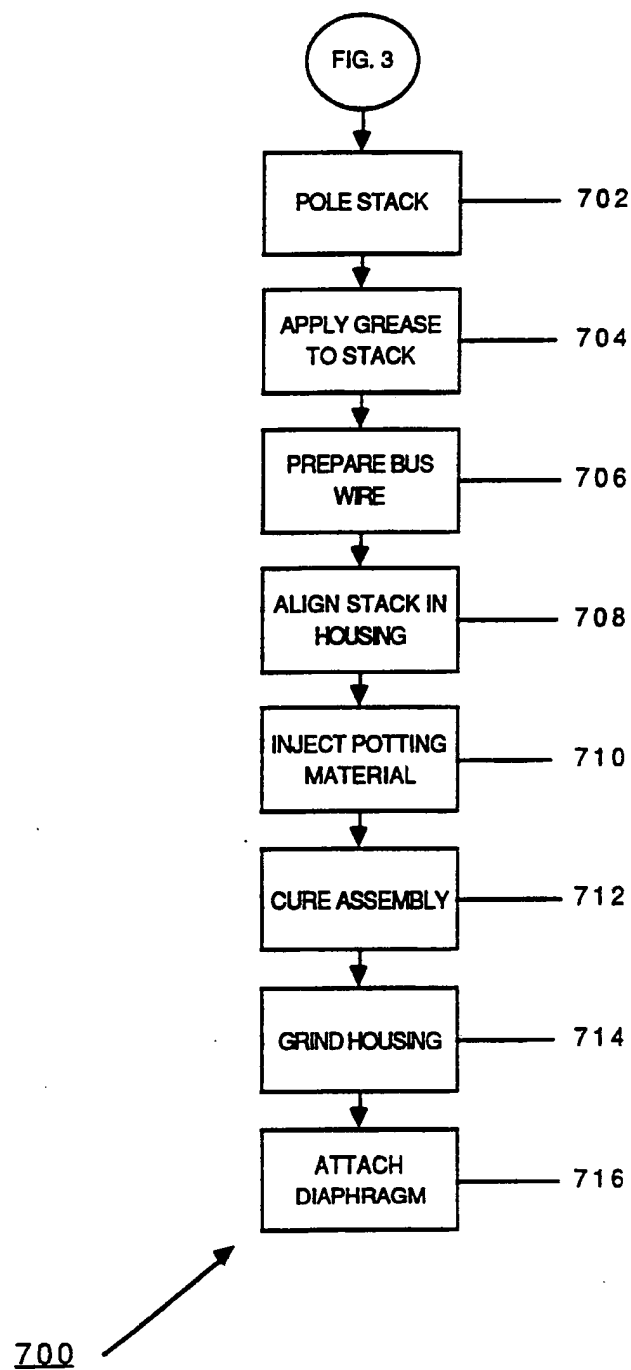


FIG. 7



INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 90/06539

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC ⁵ : H 02 N 2/00, H 01 L 41/22														
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched ⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border: 1px solid black; text-align: left;">Classification System</th> <th style="border: 1px solid black; text-align: left;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;">IPC⁵</td> <td style="border: 1px solid black; vertical-align: top;">H 02 N 2/00, H 01 L 41/00</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched ⁸</div>			Classification System	Classification Symbols	IPC ⁵	H 02 N 2/00, H 01 L 41/00								
Classification System	Classification Symbols													
IPC ⁵	H 02 N 2/00, H 01 L 41/00													
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹ <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border: 1px solid black; text-align: left;">Category ⁹</th> <th style="border: 1px solid black; text-align: left;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 10%; border: 1px solid black; text-align: left;">Relevant to Claim No. ¹³</th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">US, A, 4 382 243 (BABITZKA et al.) 03 May 1983 (03.05.83), see abstract; column 2, lines 29-44; fig. 1. ---</td> <td style="border: 1px solid black; vertical-align: top; text-align: center;">1, 9</td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">US, A, 3 501 099 (BENSON) 17 March 1970 (17.03.70), see abstract; column 10, line 52 - column 11, line 62 (cited in the application). ---</td> <td style="border: 1px solid black; vertical-align: top; text-align: center;">1, 9</td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">US, A, 4 011 474 (O'NEILL) 08 March 1977 (08.03.77), see abstract; column 2, lines 30-36 (cited in the application). ----</td> <td style="border: 1px solid black; vertical-align: top; text-align: center;">1, 9</td> </tr> </table>			Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	US, A, 4 382 243 (BABITZKA et al.) 03 May 1983 (03.05.83), see abstract; column 2, lines 29-44; fig. 1. ---	1, 9	A	US, A, 3 501 099 (BENSON) 17 March 1970 (17.03.70), see abstract; column 10, line 52 - column 11, line 62 (cited in the application). ---	1, 9	A	US, A, 4 011 474 (O'NEILL) 08 March 1977 (08.03.77), see abstract; column 2, lines 30-36 (cited in the application). ----	1, 9
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³												
A	US, A, 4 382 243 (BABITZKA et al.) 03 May 1983 (03.05.83), see abstract; column 2, lines 29-44; fig. 1. ---	1, 9												
A	US, A, 3 501 099 (BENSON) 17 March 1970 (17.03.70), see abstract; column 10, line 52 - column 11, line 62 (cited in the application). ---	1, 9												
A	US, A, 4 011 474 (O'NEILL) 08 March 1977 (08.03.77), see abstract; column 2, lines 30-36 (cited in the application). ----	1, 9												
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p> </div> </div>														
IV. CERTIFICATION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; vertical-align: top;"> Date of the Actual Completion of the International Search <div style="text-align: center;">14 May 1991</div> </td> <td style="width: 50%; border: 1px solid black; vertical-align: top;"> Date of Mailing of this International Search Report <div style="text-align: center;">02. 07. 91</div> </td> </tr> <tr> <td style="border: 1px solid black; vertical-align: top;"> International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div> </td> <td style="border: 1px solid black; vertical-align: top;"> Signature of Authorized Officer <div style="text-align: center;">  Natalie Weinberg </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center;">14 May 1991</div>	Date of Mailing of this International Search Report <div style="text-align: center;">02. 07. 91</div>	International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;">  Natalie Weinberg </div>								
Date of the Actual Completion of the International Search <div style="text-align: center;">14 May 1991</div>	Date of Mailing of this International Search Report <div style="text-align: center;">02. 07. 91</div>													
International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;">  Natalie Weinberg </div>													

ANHANG
zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX
to the International Search
Report to the International Patent
Application No.

ANNEXE
au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 90/06539 SAE 42725

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US-A - 4382243	03-05-83	DE-A1- 3031354	08-04-82
		FR-A3- 2489035	26-02-82
		FR-B3- 2489035	09-07-82
		GB-A1- 2082842	10-03-82
		GB-B2- 2082842	26-04-84
		JP-A2-57054306	31-03-82
		JP-B4-63025690	26-05-88
US-A - 3501099	17-03-70	DE-A - 1776142	01-07-71
		DE-C2- 1776142	26-05-83
		FR-A - 1582379	26-09-69
		GB-A - 1240286	21-07-71
		SE-B - 342073	24-01-72
US-A - 4011474	08-03-77	AU-A1-85344/75	07-04-77
		AU-B2- 506789	24-01-80
		BR-A - 7506398	10-08-76
		CA-A1- 1057846	03-07-79
		DE-A1- 2544140	08-04-76
		DE-B2- 2544140	10-03-77
		DE-C3- 2544140	06-10-77
		ES-A1- 441496	01-08-77
		ES-A5- 441496	01-09-77
		FR-A1- 2287111	30-04-76
		FR-B1- 2287111	06-04-79
		GB-A - 1525248	20-09-78
		IT-A - 1043080	20-02-80
		JP-A2-51085390	26-07-76
		JP-B4-55010153	14-03-80
		MX-A - 143980	17-08-81
		SE-A - 7511059	05-04-76
		SE-B - 405661	18-12-78
		SE-C - 405661	29-03-79